
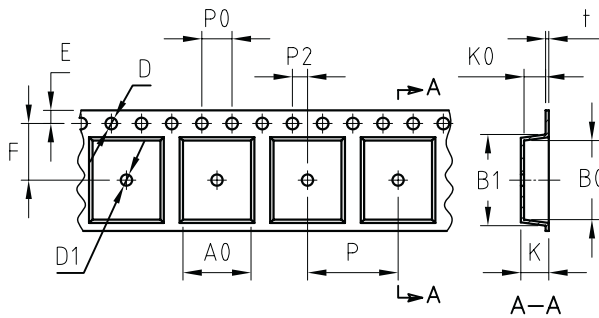


## Packaging specifications Dimensions in mm.

### DFS / MBS / THIN DFS

Tape Size	A Max.	B Max.	C	D Min.	N Min.	G Max.	T Max.
16mm	330 ±1	2.8 ±0.1	13.3 ±0.1	18±0.3	75 ±0.5	12.5 <sup>+0.3</sup> <sub>-0</sub>	17.3



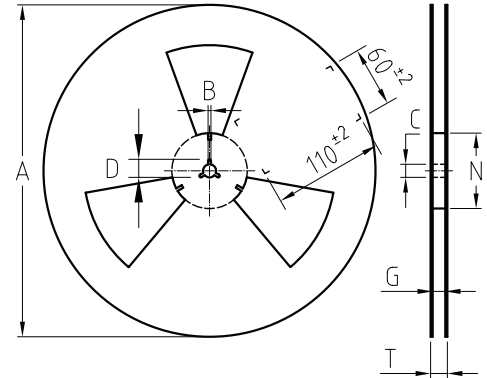


#### EMBOSED TAPE

Tape Size	D	E	P0	t Max.	A0 B0 K0	P2	CONSTANT DIMENSIONS
16mm	1.55 ±0.05	1.75 ±0.1	4 ±0.1	0.42	SEE NOTE	2±0.1	

Tape Size	B1 MAX	D1 MIN	F	K MAX	R MIN	W	P	VARIABLE DIMENSIONS
16mm	12.1	1.5 ±0.1	7.5 ±0.1	3.7	30	16±0.3	12±0.1	

NOTE: A0,B0,K0 are determined by component size. The clearance between the component and the cavity must be within 0.05mm min. to 0.90mm max. for 16mm tape.  
In addition, the components cannot rotate more than 20° within the determined cavity.

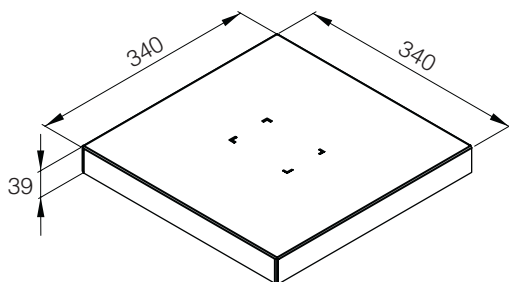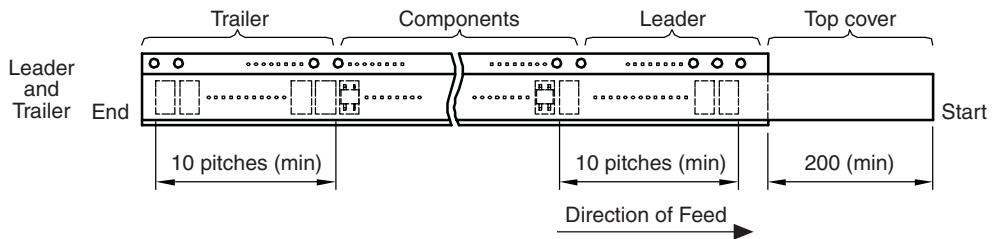

DEVICE TYPE (OUTLINE)	P (mm)	UNITS PER REEL
DFS / MBS	8	3000
DF15-S	12	1500