


Digital Terrestrial TV Antenna

Aura series

Digital and analogue TV reception for community and individual antenna installations, some models totally adapted to the LTE environment.





FEATURE

- Small size, minimum aesthetical impact maximizing the electrical parameters.
- High gain/length ratio.
- Two references adapted for the protection against LTE signals.
84401: 790 MHz LTE and 84402: 694 MHz LTE
- Easy installation, no need for tools.
- Optimized single unit packing.

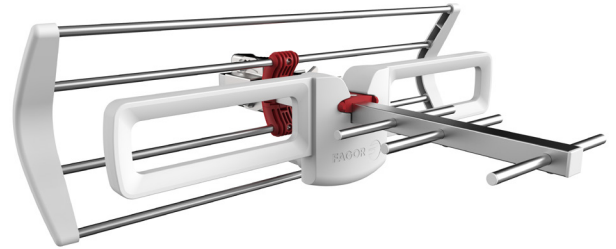

MODEL		AURA	AURA D2
Reference		84401	84402
Channels		21÷60	21÷48
Gain	dB		12
Impedance	Ω		75
Return losses	dB		15
Front to back ratio	dB		15
Horizontal opening angle	$^{\circ}$		15
length	mm		430
Packing dimensions (1UN)	mm		530x180x80
Weight	Kg		1,1
DC pass	mA		-
Packing dimensions	mm		170x105x50
Weight	Kg		0.355

APPLICATION EXAMPLES



Fagor Electrónica, S.Coop.

San Andrés, s/n. E-20500 Mondragón (Spain)

Tel.: +34 943 71 25 26 Fax: +34 943 71 28 93

E-mail: rf.sales@fagorelectronica.es

www.fagorelectronica.com

FAGOR 
Fagor Electrónica